




SM-5300X

PC Based System Scale Printer



SM-5300X EV

External Dimensions (mm)

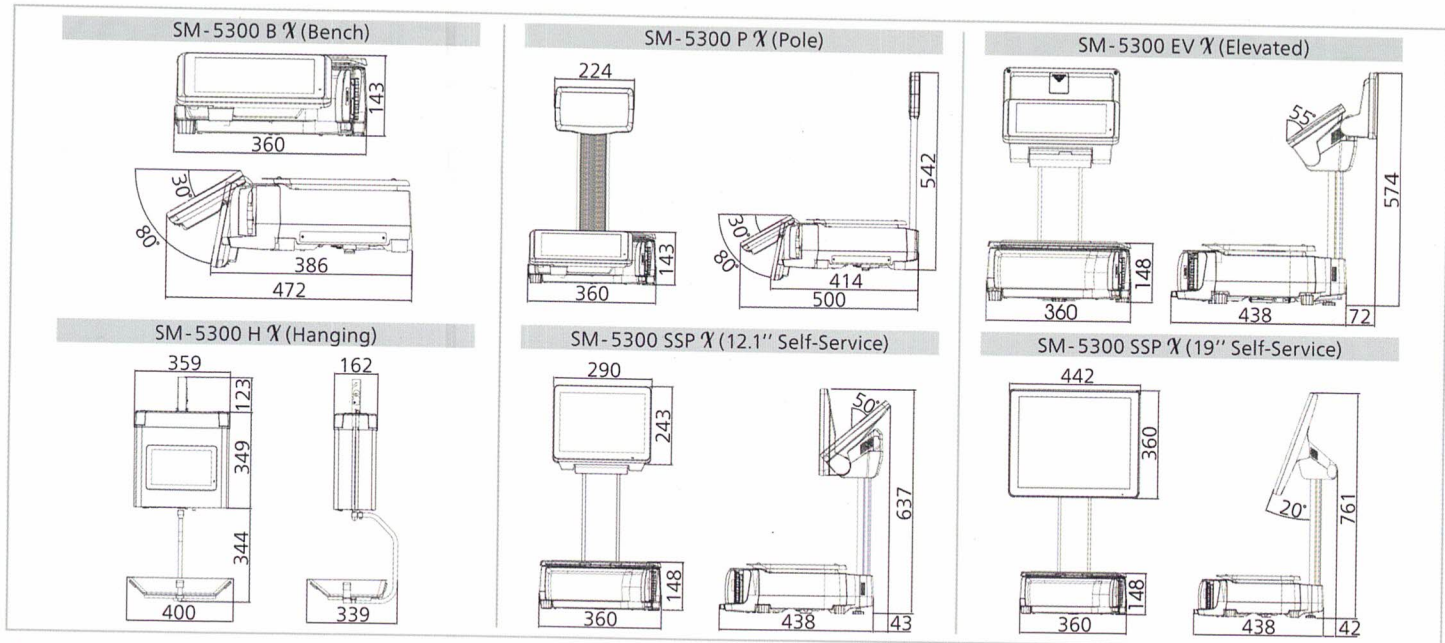

Specifications

Capacity	Max 6kg	Max 15kg / 30lb	Max 30kg
Single Interval	e = 2g	e = 5g / 0.01lb	e = 10g
Capacity	e = 1g	e = 2g	e = 5g
Multi Interval	Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
	e = 1 / 2g	e = 2 / 5g	e = 5 / 10g

Model	SM-5300 B X Bench	SM-5300 P X Pole	SM-5300 EV X Elevated	SM-5300 H X Hanging	SM-5300 SSP X 12.1'' Self-Service	SM-5300 SSP X 19'' Self-Service
Dimension W×D×H(mm)	360 x 472 x 143	360 x 500 x 542	360 x 510 x 574	400 x 339 x 816	360 x 481 x 637	442 x 480 x 761
Operator Display	10.1" WSVGA with Capacity Touch (1024 x 600)	—	—	—	—	—
Customer Display	7" WVGA (800 x 480)	—	—	—	—	—
Display Resolution	10.1" TFT SVGA with Touch (800 x 600)	—	—	—	—	—
Types	—	—	—	—	—	—
Roll Diameter	—	—	—	—	—	—
Label / Receipt	—	—	—	—	—	—
Print Width	—	—	—	—	—	—
Printing Speed	—	—	—	—	—	—
Print Resolution	—	—	—	—	—	—
Power Source	AC 100 / 110 or 220 / 230 / 240 Volts (50 / 60Hz) Auto Switch					
Operating Temperature	-10°C to +40°C					
Humidity	15% to 85% RH					
Standard Interface	Ethernet 10 / 100 Base T, 4 x USB 2.0, 1 x RJ11					
Net Weight	10.7 kg	11.7 kg	13.2 kg	14.0 kg	13.3 kg	17.0 kg

Options	Wireless LAN IEEE 802.11 a / b / g / n / ac, Base Station, e.Label with Hi-Touch, InfoTag, Queue Printer, NF-02, Speed ID & Wristband
Factory Option	Linerless Printer with Auto-Cutter

*To achieve maximum print speed, high sensitivity thermal paper is necessary.

** All the images are used for illustration purpose only.



• Specifications are subject to change without prior notice
 • Meet or exceed OIML Class III requirements

DIGI BELGIUM N.V.

NEERLANDWEG 7,
 B-2610 WILRIJK
 ANTWERP, BELGIUM
 Tel: +32-3-325 81 01
 Web: www.digisystem.com/be/nl/
 Web: www.digisystem.com/be/fr/

DIGI NEDERLAND B.V.

SMEDERIJ 6,
 1185 ZR AMSTELVEEN,
 NETHERLANDS
 Tel: +31-020-236 1300
 Web: www.digisystem.com/be/nl/



homepage/11/20